

Specifications




Description

Diesel Safe Fill, litres	55,600
AdBlue®, AUS32, DEF Safe Fill, litres	7,000
Length, mm	12,192
Width, mm	2,438
Height, mm	2,896
Tare Weight, kg	16,713
Vent Pipe	Standard
Fluid Level Dipstick	Standard
Compliance	AS1940, AS1692, AS1657, UL142



A self-bunded tank for the safe storage and handling of both diesel and AdBlue®, AUS32 or other DEF products from the one unit.

Ideal for refuelling commercial vehicles that use AdBlue®, AUS32 or DEF.

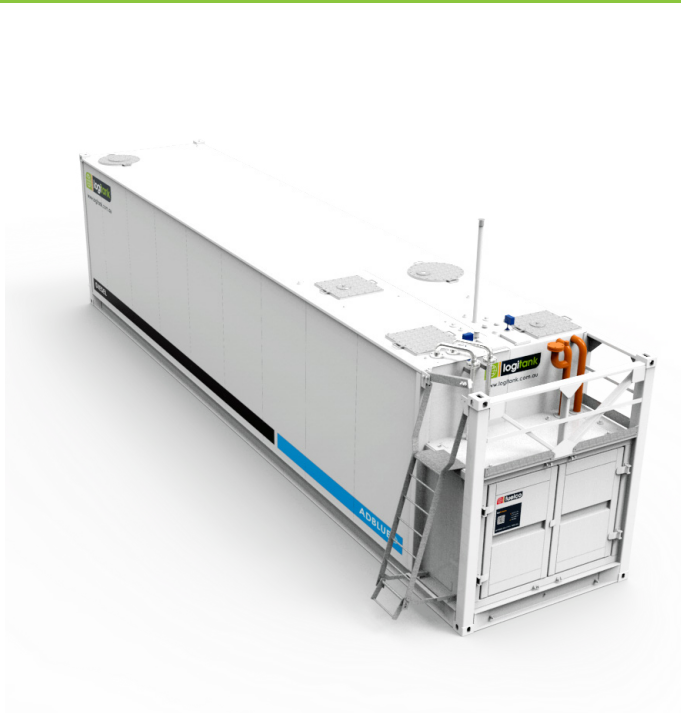

Dual Diesel and insulated DEF chemical resistant tanks

- Self-bunded dual compartment design
- Bunded pump bay with lockable weatherproof doors
- Fill and dispense points in the main lockable pump bay
- Galvanised access ladder and platform
- Corner container lock castings for ease of transport
- Access manways
- Warranty – 5 years structural, 1 year on valves

Diesel tank standard with:

- Fluid level dipsticks for tank and interstitial space
- Vent pipe for diesel tank and interstitial space
- Suction foot valve, overfill protection and electronic overfill alarm

DEF tank standard with:

- Chemical resistant vented tank
- Insulated tank and dispensing line for temperature control
- Stainless steel pipework
- Fluid level dipsticks for tank and interstitial space